




同林胶业

TONGLIN ADHESIVE

一家集研发、生产、销售和服务为一体的
专业胶业生产厂家

A PROFESSIONAL COMPANY SPECIALIZED IN RESEARCH AND
DEVELOPMENT, PRODUCTION, SALES OF ALL KINDS ADHESIVES

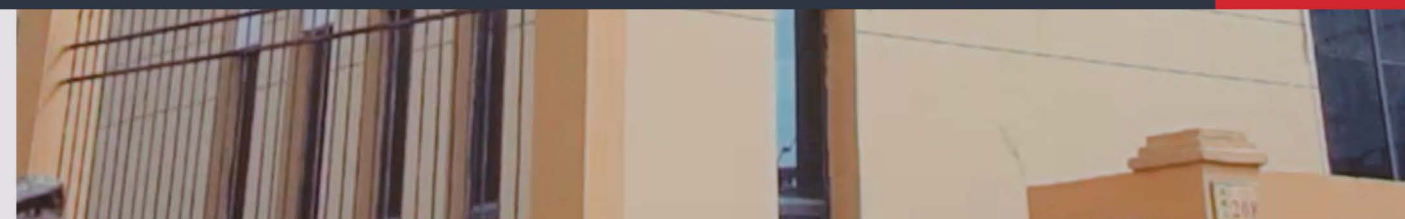

联系方式 CONTACT US

邮编ZIP/POST CODE:318056

电话TEL:0576-82654666

传真FAX:0576-82654666

Email: support@tonglintz.com

地址:浙江省台州市路桥区横街镇新横大道208号
ADD: NO.208 XINHENG AVENUE, HENGJIE TOWN, LUQIAO
DISTRICT, TAIZHOU CITY, ZHEJIANG PROVINCE

CONTENT

目录

实验室03

LABORATORY

生产车间展示04

PRODUCTION WORKSHOP DISPLAY

502瞬间胶参数05

PARAMETERS OF 502 INSTANT CYANOACRYLATE

部分产品展示07

OTHER PRODUCTS

铝管装胶水
和塑料瓶装胶水08

ADHESIVES IN ALUMINUM TUBES AND
GLUE IN PLASTIC BOTTLES

企业介绍

COMPANY PROFILE

台州市同林胶业公司

台州市同林胶业有限公司是一家专业研发、生产和经营502瞬间胶、环氧AB胶及UV光固化胶的胶粘剂企业。公司创业至今已有20余年，拥有自主进出口权，已通过ISO9000认证。

公司有一支创新意识强和经验十分丰富的专业技术力量队伍，可为国内外广大用户提供高性能、品质稳定的瞬间胶粘剂系列产品，特别是各种规格的铝管和PE瓶包装的产品。公司还能按照用户要求，研发供应性能特定的品种。我们已和国内外上百家客户建立良好的业务合作，提供优良的售后服务，信誉良好。

2000年，公司建设了一座现代化胶粘剂包装生产车间，自动化的生产线既保证了产品质量，又大大提高了生产效率，降低了成本，增强了公司市场竞争力。公司的502瞬间粘合剂广泛应用于五金机电、文具工艺、和建筑装璜等工业领域和日用修补，饮誉海内外市场。公司始终不渝地奉行“创新、求实、进取、严谨”的发展方针，不断开拓创新，视产品质量为生命，竭诚为广大用户提供满意服务。

Tonglin (Taizhou) Adhesive Co., Ltd is a professional company speci-alized in research and development production sales of all kinds of ad-hesives such as cyanoacrylate, epoxy AB adhesive and UV light curingadhesive It hasbeen established for more than 20years with independentimport and export rights, which also has obtained ISO9000 certification.

With a professional technical team that has strong sense of innova-tion and rich experience in this industry, the company can provide instantadhesive products with high performance and stable quality for domesticand foreign customers, especially various specifications of adhesiveproducts packed in aluminum tubes and PE bottles. Insisting on providingexcellent after-sales service, the company owns a good reputation in themarket and has established good business cooperation relationships withhundreds of customers at home and abroad.


In 2000, the company built a modern adhesive packaging productionworkshop. The automatic production line not only ensures the quality ofproduct, but also greatly improves the efficiency of the production, thusreducing costs and enhancing market competitiveness such as company.TongLin's brand 502 cyanoacrylate is widely used in hardware industry,mechanical and electrical,stationery, construction, decoration and dailymaintenance, which has become a well known brand in domestic and for-eign markets. The company unswerv ingly pursues the development policyof "Innovation, Practice, Aggressive and Rigorous", and keeps developingand innovating as always. It regardsproduct quality as the life of the co-mpany and wholeheartedly provides satisfactory service for all users.

实验室

LABORATORY

我们拥有**业内领先**水平的全自动灌胶设备,大幅提高了生产效率。

We have the industry's leading automatic glue filling equipment, greatly improving the efficiency of the production.

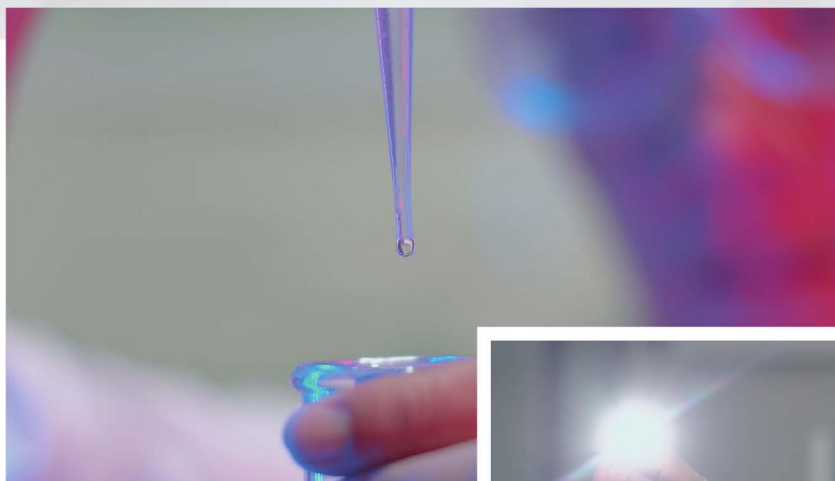

生产车间展示

PRODUCTION WORKSHOP DISPLAY

工业标准化的生产的车间,以及对包装车间实现了5S现场管理,让我们的产品**更加完美和富有竞争力。**

Industrial standardized production workshop, as well as packaging workshop with 5S on-site management, make our products perfect and competitive.



1吨▲ 1Ton



20公斤▲ 20kg



1吨▲ 1Ton



20公斤▲ 20kg

502瞬间胶系列常规产品性能参数表及特性 Performance parameters and characteristics of cyanoacrylate							
型号	产品类型	粘度值	填补间隙	木粉发烟时间	剪切强度	铁片固化时间	保质期
GRADE	CHEMICAL TYPE	VISCOSITY	GAP FILL	WOOD POWDER SMOGGING TIME	TENSILE-SHEAR STRENGTH	CURE TIME	SHELF LIFE
		(mPa·s)	(mm)	(second)	(MPa)	(second)	(month)
S505/外挂提速剂	乙基ETHYL	1.8-5	0.04	12 (S)	10	3	3/12
S506/外挂提速剂	乙基ETHYL	1.8-5	0.04	14 (S)	8	3	3/12
T502	乙基ETHYL	1.8-5	0.05	10 (T)	18	10	12
T508	乙基ETHYL	30-50	0.05	25 (T)	18	13	12

502瞬间胶系列常规产品性能参数表及特性 Performance parameters and characteristics of cyanoacrylate							
型号	产品类型	粘度值	填补间隙	木粉发烟时间	剪切强度	铁片固化时间	保质期
GRADE	CHEMICAL TYPE	VISCOSITY	GAP FILL	WOOD POWDER SMOGGING TIME	TENSILE-SHEAR STRENGTH	CURE TIME	SHELF LIFE
		(mPa·s)	(mm)	(second)	(MPa)	(second)	(month)
S505M/外挂提速剂	乙基ETHYL	1.8-5	0.04	8 (S)	10	3	1/12
T502-B	乙基ETHYL	1.8-5	0.05	30 (S)	17	8	18
S5502	乙基ETHYL	1.8-5	0.05	25 (S)	18	7	18
S508	乙基ETHYL	30-50	0.07	25 (S)	18	8	18
S5495	乙基ETHYL	30-50	0.07	25 (S)	18	8	18
S5401	乙基ETHYL	80-120	0.1	30 (S)	18	8	18
CA-S1500	乙基ETHYL	1000-1500	0.2	/	20	25	12
CA-S3000	乙基ETHYL	2000-3000	0.25	/	20	25	12
CA-S15000	乙基ETHYL	>10000	0.3	/	20	25	12
硅胶专用胶B	乙基ETHYL	80-120	0.1	20 (S)	20	8	2

部分产品展示

OTHER PRODUCTS



OEM代工产品： OEM Products:

我们的OEM团队已有**二十多年**的代工生产经验。
一流的胶水品质，稳定的零配件供应商系统，先进的灌胶设产设备，5S标准化的包装车间，让我们可以持续不断的为客户提供超一流的产品。
垂直的管理模式、产品经理负责制以及我们团队秉承**“客户的需求就是我们的追求”**的思想，我们可以为客户提供各种样式的客制化包装方案，助力客户开拓市场。

Our team has more than 20 years of experience in OEM production.
With the help of the first-class glue quality, advanced glue production equipment, strong supply chain and 5S standardized packaging workshop, we can continue to provide first-class products for customers.
Adhering to the principle of “Customers’ Demand is Our Pursuit”, the company adopts vertical management mode and product manager responsibility system and provides customers with a variety of customized packaging solutions to help them expand their market



自有品牌产品:

公司自有品牌曾荣获中国驰名商标称号，远销海内外。

我们现有2g铝管装，8g，20g等产品，这个系列的产品引进了国外领先的配胶技术和生产工艺，该系列产品具有**保质期长，速度快，粘结力好，低白化**等特性，深受用户喜爱。

Products Sold with Our Own Brand.

The company owns the brand, which has won the title of China's well-known trademark. Our products are sold well at home and abroad.

At present, our company has 2g aluminum tube products, 8g aluminum tube products, 20g plastic bottles and other products. This series of products are produced according to leading glue technology and production process, with the characteristics of long shelf life, fast solidification speed, good cohesive force, and low blooming. So these products are deeply welcomed by customers.



表面处理剂/Surface Treatment Agent

介绍:

针对一些难粘连材质的表面处理,如PE,PP,ABS,砂橡胶,EPDM或一些弹性体。

Introduction:

This product is suitable for the surface treatment of PE, PP, ABS, silicone rubber, EPDM and some elastic products which are not easy to stick together

使用方法:

取适量处理剂均匀涂抹两接触面,等待15-20S再涂上瞬间胶即可。

How to Use:

Apply an appropriate amount of surface treatment agent on both contact surfaces evenly, wait for 15-20s, then apply the instant glue.

解胶剂/Degumming Agent

介绍:

去除固化的瞬间胶。

Introduction:

This product is suitable for removing solidified instant glue.

使用方法:

先将表面处理干净,涂抹适量解胶剂在固化的胶水之上,完全覆盖,视面积大小及厚度决定时间长短,待其软化,使用适当工具刮出即可。若厚度较厚,可重复以上操作多次处理。解胶剂不易伤害大部分的塑料或油漆,但为求安全使用,请先小面积试用。

How to Use:

First, clean the surface, apply a proper amount of degumming agent on solidified glue, please completely cover the surface of the solidified glue. Second, wait for a while until it becomes soft, waiting time is based on the size and thickness of the solidified glue. Third, use an appropriate tool to scrape it. Please repeat above operation for several times if the solidified glue is too thick. This degumming agent doesn't damage most plastics or paints. For safe use, please try it in a small area first.

